


Main unit

To remove

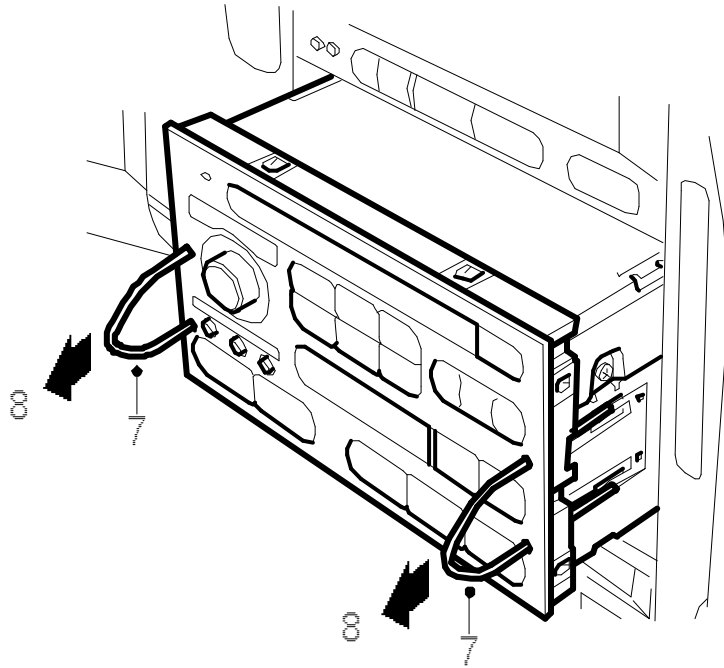

E367R053

1. Connect Tech 2.
2. Initiate communication with the audio system.
3. Select "PROGRAMMING " in the system menu.
The message "MARRIAGE/DIVORCE " is displayed.
4. Press "ENTER ".
5. Select DIVORCED with the change button and press "OK "。
 - "DIVORCED " must be selected when removing the main unit (to be installed in another car or to be returned for warranty repair).
6. The radio will now stop playing after a delay and "RADIO CODE" will be shown on SID.
7. Press both special tools into the holes provided for them in the main unit. Press the tools in until they lock, at which point a click will be heard.

8. Extract the main unit using the tool handles. Remove the special tools.

To fit

Note

Check that the attaching hooks on the ends of the main unit are not damaged (bent in).

1. Push the main unit into the space provided for it in the centre console until a click is heard.
2. With Tech 2 connected and communication established with the Audio system, select "PROGRAMMING " from the system menu.

The message "MARRIAGE/DIVORCE " is displayed.

3. Press "ENTER ".
4. Select MARRIED with the change button and press " OK ".
- "MARRIED " must be selected when installing a main unit into a Saab 9-5.
5. "RADIO CODE" disappears from SID and the sound returns after a slight delay.



Warning

The CD player in the main unit is a Class 1 laser product.

- The CD player in the main unit should be serviced and repaired by a qualified technician only.
- If the casing on the main unit is damaged, laser radiation can occur with risk of injury.