


Loudspeakers, front doors

To remove

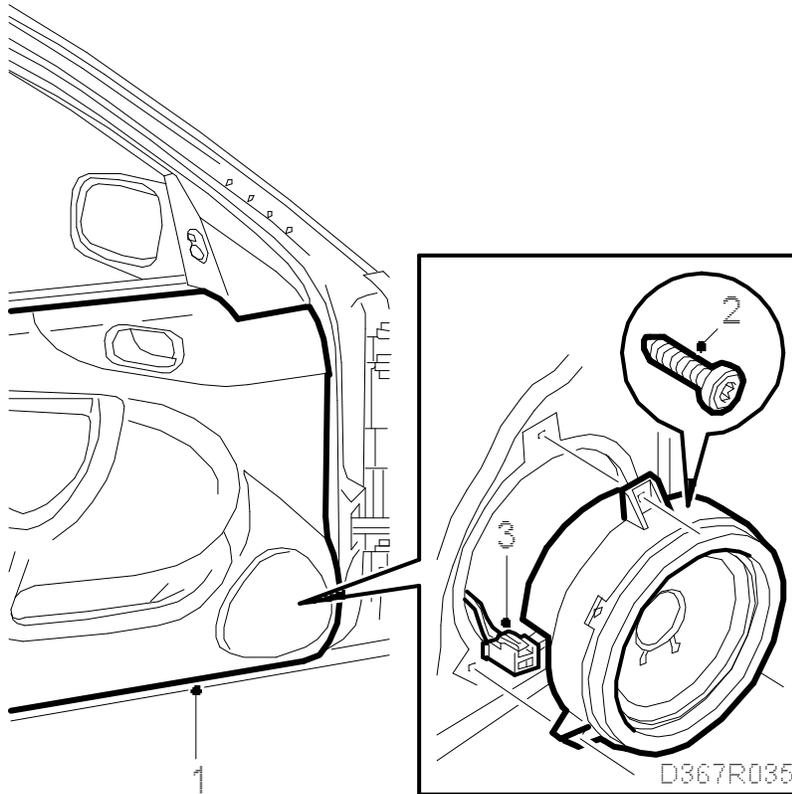

1. Remove the door trim to gain access to the loudspeakers.
2. Remove the screws securing the loudspeakers.
3. Take out the loudspeaker and unplug the connectors.

To fit

Fit in reverse order.

Note

To obtain the best sound from the loudspeakers, the doors should be air-tight.